


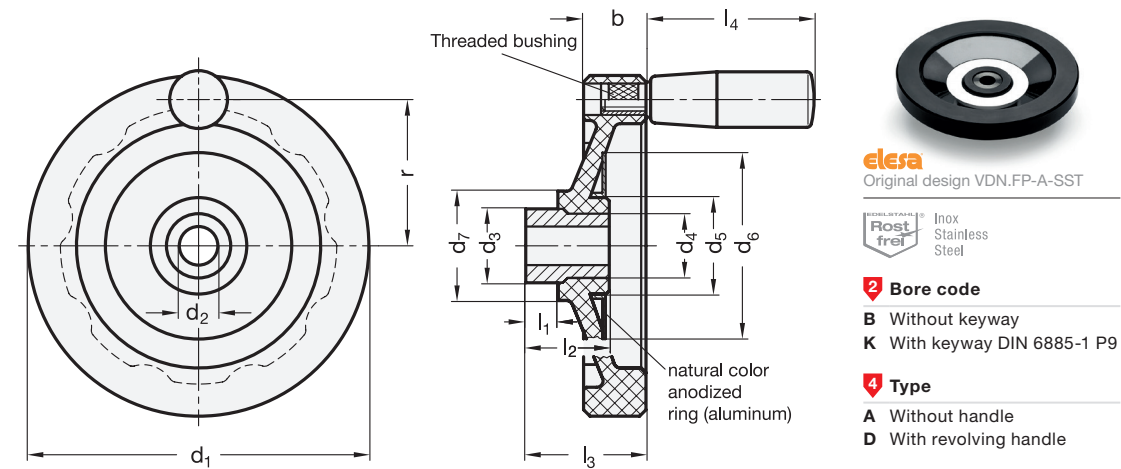

d ₁	d ₂ H7 Bore		b		d ₃	d ₄		d ₅		d ₆		d ₇	l ₁	l ₂		l ₃	l ₄		r	Ø Handle
			Type A	Type D		Type A	Type D	Type A	Type D	Type A	Type D			Type A	Type D		Type A	Type D		
80*	10	12	14	-	20	18	-	28	-	43	-	30	10	28	-	31	-	-	-	-
100	10	12	15	21	24	22	20	35	35	54	54	39	12	36	33,5	40	46	50	39	21
125	12	14	15	28	32	26,5	26,5	44	44	70	70	46	15	38	38	44	57	65	50	23
150	14	16	18	30	32	26,5	26,5	44	50	70	80	48	15	38	38	49	61	65	62	23
200	18	20	21	32	40	33	33	55	55	90	90	60	15	43	43	58	68	90	82	28
250	22	24	25	36	49	40	40	66	66	110	110	70	15	44	44,5	65	76	90	106	28
300	26	-	25	36	58	58	58	94	94	148	148	82	18	56	56	75	87	90	132	28

* only available in Type A

Specification

Wheel body

- Plastic, Phenolic resin (PF)
- Reinforced
 - Operating temperature -20 °C to +110 °C
 - Black, shiny finish

Hub bushing

Stainless steel AISI 30

Threaded bushing

Stainless steel AISI 303

Revolving Handle GN 598

- Plastic, Phenolic resin (PF)
- Black, shiny finish
 - Spindle
- Stainless steel AISI 303

RoHS

On request

- Without hub bore

Disk handwheels GN 520.2 are renowned in particular for the matte passivated aluminum ring.

The tough, reinforced black plastic (Duroplast PF) and high gloss polished surface give the disk handwheels a touch of elegance.

The ergonomic handle is easy to grasp and makes the disc handwheels easier to use.

see also...	Page
GN 521.5 Disk Handwheels (Polypropylene, Hub Bushing Stainless Steel)	QVX
GN 520.1 Disk Handwheels (Phenolic Resin, Hub Bushing Steel)	QVX

Technical Information

Keyways P9 DIN 6885-1	QVX
Cross holes GN 110	QVX
ISO Fundamental Tolerances	QVX
Plastic Characteristics	QVX
Stainless Steel Characteristics	QVX

Accessory

GN 184.5 Countersunk Washers (for Axial Fixing)	QVX
---	-----

How to order	1 d ₁
	2 Bore code
	3 d ₂
	4 Type
GN 520.2-125-K14-D	